


PROFICIENT[®]

AUDIO

a **Nice** brand

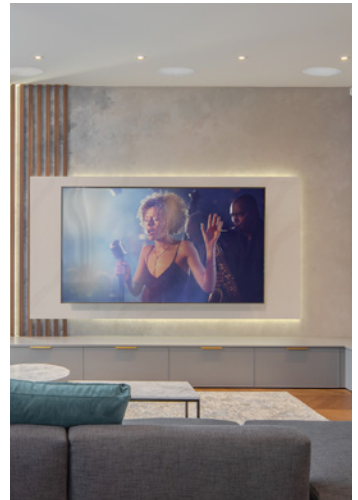

Product Catalog

Meet the Family of Proficient Audio Solutions

Elevated Audio Performance



Signature Series



Home Theater



Whole House



**Cabinet
Loudspeakers**




Subwoofers



Outdoor Sound



Electronics

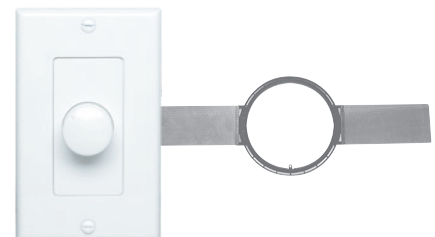

Accessories

Contents

Architectural Small Opening System	5
Electronics 4-Channel Amplifier	6
Signature Series	7
Signature Ceiling LCR Speakers	9
Signature In-Wall LCR Speakers	10
Signature Whole-House Speakers	11
Protege Series	12
Protege Ceiling LCR Speakers	14
Protege In-Wall LCR Speakers	15
Protege Whole-House Speakers	16
Protege Whole-House Ceiling Speakers	17
Protege Whole-House In-Wall Speakers	18
Protege Twin-Tweeter Ceiling Speakers	19
Protege Cabinet Speakers	21
Proficient Subwoofers	23
Reference Powered Subwoofers.....	25
Signature Powered Subwoofers.....	26
Protege Powered Subwoofers	27
Reference Powered Kits.....	28
Passive Architectural Subwoofers	29
Indoor/Outdoor and Landscape Speakers.....	30
All-Weather Speakers	32
All-Weather Twin-Tweeter Speakers.....	33
Signature Landscape Speakers	34
Speaker Accessories.....	35
Protege Landscape Speakers	36
Protege Rock Speakers	38
Protege Planter Speakers	40
Volume Controls	41
Accessories	42
Ceiling Tile Brackets.....	43
Back Boxes	43
Pre-Construction Brackets.....	44
Ceiling Replacement Speaker Grilles.....	45
In-Wall Replacement Speaker Grilles.....	46
Indoor/Outdoor Replacement Speaker Grilles.....	46



Architectural Small Opening System

Amazing sound, quality and aesthetics.



PAS-C355 3 1/2" In-Ceiling Speaker

ITEM
PAS-C355

U/M
Each

The PAS-C355 high performance 3.5" In-Ceiling Speaker delivers dynamic and impactful sound in a compact form factor. Leveraging advanced technology and materials, its high-excursion glass fiber woofer, proportionately massive silk dome tweeter, custom crossover design, and versatile installation options make it a top choice for those seeking premium performance without compromising on aesthetics.

Appealing to the most fastidious designer's needs, with both round and square grilles included and flush mount kits available.

Designed and engineered in the USA, in tandem with the PAS-C854-SUB In-Ceiling Subwoofer and PAS-A4100 Amplifier to deliver a complete system, optimized for aesthetics, performance, and flexibility.

- Power Handling: 30 – 70 Watts
- Frequency Response: 70Hz – 20kHz
- Impedance: 8Ω
- Sensitivity: 80dB
- Diameter x Depth: 5.25" x 3.5"
- Ceiling Cut Out: 4.75"
- Use Pre-Con bracket: SC-IC3-PCB
- Use Flush Mount Round: SC-IC3-FLUSH-ROUND
- Use Flush Mount Square: SC-IC3-FLUSH-SQUARE



PAS-C854-SUB In-Ceiling Subwoofer

ITEM
PAS-C854-SUB

U/M
Each

The PAS-C854-SUB In-Ceiling Subwoofer delivers best-in-class, deep bass performance through a small, finished opening to meet the aesthetic needs of the modern home. Designed to hide the woofer cabinet between ceiling joists and port the low-frequency sound through a small, 4.75" opening in the ceiling. It features a custom 8.27" polypropylene woofer, dual 1.5" voice coils, precision tuned port tube and a vinyl wrapped MDF cabinet, mounted to a single joist.

- Power Handling: 50 – 100 Watts
- Frequency Response: 20Hz – 300Hz
- Impedance: Dual 8Ω Voice Coil
- Sensitivity: 71dB
- Diameter x Depth: 5.25" x 7.125"
- Cabinet with Port Tube (L x W x D): 25.188" x 12" x 7.125"
- Finished Grille Dimensions: 5.25"

Electronics 4-Channel Amplifier



PAS-A4100 8" 2/3/4 Channel Analog Filtering Amplifier

ITEM
TBD

U/M
Each

The PAS-A4100 is designed for flexibility and convenience for the vast majority of distributed audio and home entertainment applications. This single rack-mount chassis is powerful, easy to configure and install.

The PAS-A4100 delivers up to 100 watts of power to each of four independent channels. It is bridgeable in pairs—doubling the output and enabling two, three, or four channel configuration.

Additionally, each channel has two selectable analog high pass filters. These filters are critical to optimize the performance of connected satellite speakers or subwoofers, without the hassle of DSP or IP.

Independent level control allows you to trim the signal for lower output to small speakers or turn all the way up for max power. The amplifier is stable at a low impedance, so it can drive multiple satellite speakers or a subwoofer from each channel.

Preamp outputs on every channel allow for patching to an adjacent channel or sending the signal to another device. Audio sensing, and in-and-out triggers add power management convenience. Each channel has a signal and clipping indicator located on the brushed aluminum front panel for easy troubleshooting and signal verification. Rack ears and tabletop feet are included for mounting options.

- Max Power 100w x 4 into 8Ω with all channels driven
- Max Power 160W x 4 - Max 3ea 8Ω speaker per channel (2.67Ω stable)
- 100w x 2 + 200w x 1 into 8Ω bridge Mode
- 200w x 2 into 8Ω bridge Mode
- Selectable low-pass /full-range/high-pass filters per channel
- Designed to power subwoofers and multiple speakers together
- Turn-On Modes Audio Sense, Always On, Trigger Voltage (3-24V VAC/DC 20mA)
- Trigger Output 12V DC 150mA
- Rack Mount Hardware Included
- Dimensions (H x W x D): 11.5" x 17" x 1.5"



PROFICIENT
Signature[™]

Signature Design, Exceptional Sound

A flagship product line built for the few, not the many. Its creation is free of restrictions that favor bottom line compromise ahead of top line performance. These considerations led us to product Proficient Signature Speaker Series.

It's our best of everything, an all star lineup featuring nine flagship speakers from home theatre to whole house audio. Each speaker represents an unmatched combination of power, precision and performance. Proficient Signature Speakers are all about qualities rarely seen working an playing well together in many other speaker brands. Like value and luxury. Innovation and tradition. Exuberance and poise.

The Proficient Signature Speakers series is where sound performance you never thought possible becomes something you just can't live without.



Signature Ceiling LCR Speakers

Signature Architectural Speakers



Signature C1075s 10" Ceiling LCR Speaker

ITEM	U/M
C1075s	Each

One LCR ceiling speaker with woofer and midrange/tweeter bridge fixed at a 15° angle. 10" Kevlar® woofer, 3" pivoting Kevlar® midrange, 1" pivoting aluminum dome tweeter, ±3dB midrange and treble contour switches and 200 watt power handling. Required for installation, the included PCB-C1000 bracket is designed for new construction as well as retrofit applications.

- | | |
|--|---|
| <ul style="list-style-type: none">• Power Handling: 200 Watts• Frequency Response: 25Hz – 22kHz• Impedance: 4Ω• Sensitivity: 92dB 1W/1m | <ul style="list-style-type: none">• Includes Thin-Bezel Grille held by Neo Magnets• Diameter x Depth: 13.375" x 7.625"• Ceiling Cut Out: 11.875"• Includes Pre-Con Bracket PCB-C1000 |
|--|---|



Signature C875s 8" Ceiling LCR Speaker

ITEM	U/M
C875s	Each

One LCR ceiling speaker with woofer and tweeter bridge fixed at a 15° angle. 8" Kevlar® woofer and 1" pivoting aluminum dome tweeter, ±3dB bass and treble contour switches and 175 watt power handling.

- | | |
|--|--|
| <ul style="list-style-type: none">• Power Handling: 175 Watts• Frequency Response: 28Hz – 22kHz• Impedance: 8Ω• Sensitivity: 92dB 1W/1m | <ul style="list-style-type: none">• Includes Thin-Bezel Grille held by Neo Magnets• Diameter x Depth: 11.125" x 5.875"• Ceiling Cut Out: 9.75"• Use Pre-Con Bracket PCB-C800 pg #44 |
|--|--|



Signature C675s 6½" Ceiling LCR Speaker

ITEM	U/M
C675s	Each

One LCR ceiling speaker with woofer and tweeter bridge fixed at a 15° angle. 6.5" Kevlar® woofer and 1" pivoting aluminum dome tweeter and 125 watt power handling.

- | | |
|--|---|
| <ul style="list-style-type: none">• Power Handling: 125 Watts• Frequency Response: 32Hz – 22kHz• Impedance: 8Ω• Sensitivity: 90dB 1W/1m | <ul style="list-style-type: none">• Includes Thin-Bezel Grille held by Neo Magnets• Diameter x Depth: 9.25" x 3.9375"• Ceiling Cut Out: 8.25"• Use Pre-Con Bracket PCB-C600 pg #44 |
|--|---|



Signature In-Wall LCR Speakers

Signature Architectural Speakers



Signature IW675s 6 1/2" In-Wall LCR Speaker

ITEM U/M
IW675s Each

One in-wall LCR speaker with two 6.5" Kevlar® woofers, 1" pivoting aluminum dome tweeter, ±3dB bass and treble contour switches and 150 watt power handling. Fits horizontally between 16" on-center wall studs.

- Power Handling: 150 Watts
- Frequency Response: 40Hz – 22kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Dimensions (H x W x D): 9" x 16.125" x 3.1875"
- Wall Cut Out (H x W): 7.5" x 14.5"
- Use Pre-Con Bracket PCB-IW600 pg#44



Signature IW575s 5 1/4" In-Wall LCR Speaker

ITEM U/M
IW575s Each

One in-wall LCR speaker with two 5.25" Kevlar® woofers, 1" pivoting aluminum dome tweeter, ±3dB bass and treble contour switches and 125 watt power handling.

- Power Handling: 125 Watts
- Frequency Response: 50Hz – 22kHz
- Impedance: 8Ω
- Sensitivity: 88dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Dimensions (H x W x D): 8" x 15.9375" x 3.375"
- Wall Cut Out (H x W): 6.1875" x 14.5"
- Use Pre-Con Bracket PCB-IW500 pg#44

Signature Whole-House Speakers

Whole House Audio System Entertainment



Signature C895s 8" Ceiling Speakers

ITEM	U/M
C895s	Pair

One pair of ceiling speakers with 8" Kevlar® woofers, cast magnesium woofer baskets, 1" pivoting aluminum dome tweeters, ±3dB bass and treble contour switches and 175 watt power handling.

- Power Handling: 175 Watts
- Frequency Response: 28Hz – 22kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 11.125" x 4.5"
- Ceiling Cut Out: 9.75"
- Use Pre-Con Bracket PCB-C800 pg#44



Signature C695s 6½" Ceiling Speakers

ITEM	U/M
C695s	Pair

One pair of ceiling speakers with 6.5" Kevlar® woofers, cast magnesium woofer baskets, 1" pivoting aluminum dome tweeters, +3dB bass and treble contour switches and 150 watt power handling.

- Power Handling: 150 Watts
- Frequency Response: 32Hz – 22kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9.25" x 3.9375"
- Ceiling Cut Out: 8.25"
- Use Pre-Con Bracket PCB-C600 pg#44



Signature W695s 6½" In-Wall Speakers

ITEM	U/M
W695s	Pair

One pair of in-wall speakers with 6½" Kevlar® woofers, cast magnesium woofer baskets, 1" pivoting aluminum dome tweeters, +3dB bass and treble contour switches and 150 watt power handling.

- Power Handling: 150 Watts
- Frequency Response: 32Hz – 22kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Dimensions (H x W x D): 12.25" x 8.1875" x 3.375"
- Wall Cut Out (H x W): 10.875" x 6.75"
- Use Pre-Con Bracket PCB-W600 pg#44



Audio, Elevated. Protege.

Proficient Protege delivers the perfect balance of premium performance, refined aesthetics, and lasting value. Created for residential and light commercial installations, these speakers bring rich, immersive sound to every space while blending seamlessly into the architecture.

Whether installed in ceilings, walls, multi-room environments, or for immersive outdoor listening, each Protege speaker is built with carefully selected components, precision-tuned acoustics, and installer-friendly features that ensure exceptional results from room to room. Experience detailed highs, natural midrange, and deep, controlled bass from a speaker line engineered to exceed expectations. Advanced design and materials create a balanced listening experience that's equally suited for background music, entertaining, or home media applications.

From single-room audio to whole-home systems, Protege offers scalable solutions for projects of every size. Multiple speaker types, sizes and form factors ensure the right speaker for every application while maintaining a consistent sound signature throughout the installation.



PROFICIENT
Protege[™]

Protege Ceiling LCR Speakers

Protege Architectural Speakers



Protege C841 8" Ceiling LCR Speaker

ITEM	U/M
PAS13841	Each

One LCR ceiling speaker with woofer and tweeter bridge fixed at a 15° angle. 8" graphite woofer and 1" pivoting silk dome tweeter, ±3dB bass and treble contour switches and 150 watt power handling.

- | | |
|--|---|
| <ul style="list-style-type: none">• Power Handling: 150 Watts• Frequency Response: 40Hz – 22kHz• Impedance: 8Ω• Sensitivity: 92dB 1W/1m | <ul style="list-style-type: none">• Includes Thin-Bezel Grille held by Neo Magnets• Diameter x Depth: 11.125" x 5.875"• Ceiling Cut Out: 9.75"• Use Pre-Con Bracket PCB-C800 pg#44 |
|--|---|



Protege C661 6½" Ceiling LCR Speakers

ITEM	U/M
PAS11626	Pair

One LCR ceiling speaker with woofer and tweeter bridge fixed at a 15° angle. 6.5" graphite woofer and 1" pivoting aluminum dome tweeter and 125 watt power handling.

- | | |
|--|---|
| <ul style="list-style-type: none">• Power Handling: 125 Watts• Frequency Response: 36Hz – 22kHz• Impedance: 8Ω• Sensitivity: 92dB 1W/1m | <ul style="list-style-type: none">• Includes Thin-Bezel Grille held by Neo Magnets• Diameter x Depth: 9.25" x 4.625"• Ceiling Cut Out: 8.25"• Use Pre-Con Bracket PCB-C600 pg#44 |
|--|---|



Protege C651 6½" Ceiling LCR Speaker

ITEM	U/M
PAS13651	Each

One LCR ceiling speaker with woofer and tweeter bridge fixed at a 15° angle. 6.5" polypropylene woofer and 1" pivoting silk dome tweeter and 100 watt power handling.

- | | |
|--|---|
| <ul style="list-style-type: none">• Power Handling: 100 Watts• Frequency Response: 45Hz – 20kHz• Impedance: 8Ω• Sensitivity: 91dB 1W/1m | <ul style="list-style-type: none">• Includes Thin-Bezel Grille held by Neo Magnets• Diameter x Depth: 9.25" x 4.625"• Ceiling Cut Out: 8.25"• Use Pre-Con Bracket PCB-C600 pg#44 |
|--|---|

Protege In-Wall LCR Speakers

Protege Architectural Speakers



Protege IW630 6½" In-Wall LCR Speaker

ITEM	U/M
PAS22630	Each

- One in-wall LCR speaker with two 6.5" graphite woofers, 1" pivoting soft dome tweeter, ±3dB bass and treble contour switches and 125 watt power handling. Fits horizontally between 16" on-center wall studs.
- Power Handling: 125 Watts
 - Frequency Response: 55Hz – 20kHz
 - Impedance: 8Ω
 - Sensitivity: 90dB 1W/1m
 - Includes Thin-Bezel Grille held by Neo Magnets
 - Dimensions (H x W x D): 9" x 16.125" x 3"
 - Wall Cut Out (H x W): 7.5" x 14.5"
 - Use Pre-Con Bracket PCB-IW600 pg#44



Protege IW530 5¼" In-Wall LCR Speaker

ITEM	U/M
PAS22530	Each

- One in-wall LCR speaker with two 5.25" graphite woofers, 1" pivoting aluminum dome tweeter, ±3dB bass and treble contour switches and 100 watt power handling.
- Power Handling: 100 Watts
 - Frequency Response: 65Hz – 20kHz
 - Impedance: 8Ω
 - Sensitivity: 88dB 1W/1m
 - Includes Thin-Bezel Grille held by Neo Magnets
 - Dimensions (H x W x D): 8" x 15.9375" x 3.4375"
 - Wall Cut Out (H x W): 6.1875" x 14.5"
 - Use Pre-Con Bracket PCB-IW500 pg#44

Protege Whole-House Ceiling Speakers

Whole House Audio System Entertainment



Protege C801 8" Ceiling Speakers

ITEM
PAS11801 **U/M**
Pair

One pair of ceiling speakers with 8" graphite woofers, 1" pivoting aluminum dome tweeters, +3dB bass and treble contour switches and 150 watt power handling.

- Power Handling: 150 Watts
- Frequency Response: 28Hz – 22kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 11.125" x 4.25"
- Ceiling Cut Out: 9.75"
- Use Pre-Con Bracket PCB-C800 pg#44



Protege C791 8" Ceiling Speakers

ITEM
PAS11791 **U/M**
Pair

One pair of ceiling speakers with 8" polypropylene woofers, 1" pivoting soft dome tweeters and 125 watt power handling.

- Power Handling: 125 Watts
- Frequency Response: 36Hz – 20kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 11.125" x 4.25"
- Ceiling Cut Out: 9.75"
- Use Pre-Con Bracket PCB-C800 pg#44



Protege C641 6½" Ceiling Speakers

ITEM
PAS11641 **U/M**
Pair

One pair of ceiling speakers with 6.5" graphite woofers, 1" pivoting aluminum dome tweeters, +3dB bass and treble contour switches and 125 watt power handling.

- Power Handling: 125 Watts
- Frequency Response: 32Hz – 22kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9.25" x 3.625"
- Ceiling Cut Out: 8.25"
- Use Pre-Con Bracket PCB-C600 pg#44



Protege C635 6½" Ceiling Speakers

ITEM
C635 **U/M**
Pair

One pair of ceiling speakers with 6.5" aluminum woofers, 1" pivoting titanium dome tweeters and 100 watt power handling.

- Power Handling: 100 Watts
- Frequency Response: 40Hz – 22kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9.25" x 3.75"
- Ceiling Cut Out: 8.25"
- Use Pre-Con Bracket PCB-C600 pg#44



Protege C626 6½" Ceiling Speakers

ITEM
PAS11626 **U/M**
Pair

One pair of ceiling speakers with 6.5" graphite woofers, 1" pivoting silk dome tweeters and 100 watt power handling.

- Power Handling: 100 Watts
- Frequency Response: 45Hz – 20kHz
- Impedance: 8Ω
- Sensitivity: 91dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9.25" x 4"
- Ceiling Cut Out: 8.25"
- Use Pre-Con Bracket PCB-C600 pg#44

Protege Whole-House Ceiling Speakers

Whole House Audio System Entertainment



Protege C621 6½" Ceiling Speakers

ITEM
PAS11621

U/M
Pair

One pair of ceiling speakers with 6.5" polypropylene woofers, 1" pivoting silk dome tweeters and 100 watt power handling.

- Power Handling: 100 Watts
- Frequency Response: 45Hz – 20kHz
- Impedance: 8Ω
- Sensitivity: 91dB 1W/1m

- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9.25" x 3.625"
- Ceiling Cut Out: 8.25"
- Use Pre-Con Bracket PCB-C600 pg#44



Protege C612 6½" Ceiling Speakers

ITEM
PAS11612

U/M
Pair

One pair of ceiling speakers with 6.5" polypropylene woofers, 1" pivoting soft dome tweeters and 85 watt power handling.

- Power Handling: 85 Watts
- Frequency Response: 45Hz – 20kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m

- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9.25" x 3.9375"
- Ceiling Cut Out: 8.25"
- Use Pre-Con Bracket PCB-C600 pg#44



Protege C606 6½" Ceiling Speakers

ITEM
PAS11606

U/M
Pair

One pair of ceiling speakers with 6.5" polypropylene woofers, .75" soft dome tweeters and 75 watt power handling.

- Power Handling: 75 Watts
- Frequency Response: 45Hz – 20kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m

- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9.25" x 3.625"
- Ceiling Cut Out: 8.25"
- Use Pre-Con Bracket PCB-C600 pg#44

Protege Whole-House In-Wall Speakers

Whole House Audio System Entertainment



Protege W802 8" In-Wall Speakers

ITEM	U/M
PAS21802	Pair

One pair of in-wall speakers with 8" graphite woofers, 1" pivoting aluminum dome tweeters, +3dB bass and treble contour switches and 150 watt power handling.

- | | |
|--|--|
| <ul style="list-style-type: none">• Power Handling: 150 Watts• Frequency Response: 28Hz – 22kHz• Impedance: 8Ω• Sensitivity: 92dB 1W/1m | <ul style="list-style-type: none">• Includes Thin-Bezel Grilles held by Neo Magnets• Dimensions (H x W x D): 14.675" x 10.125" x 3.75"• Wall Cut Out (H x W): 13.625" x 8.75"• Use Pre-Con Bracket PCB-W800 pg#44 |
|--|--|



Protege W672 6½" In-Wall Speakers

ITEM	U/M
PAS21672	Pair

One pair of in-wall speakers with 6.5" polypropylene woofers, 1" pivoting silk dome tweeters and 100 watt power handling.

- | | |
|--|--|
| <ul style="list-style-type: none">• Power Handling: 100 Watts• Frequency Response: 36Hz – 20kHz• Impedance: 8Ω• Sensitivity: 91dB 1W/1m | <ul style="list-style-type: none">• Includes Thin-Bezel Grilles held by Neo Magnets• Dimensions (H x W x D): 12.25" x 8.1875" x 3.125"• Wall Cut Out (H x W): 10.875" x 6.75"• Use Pre-Con Bracket PCB-W600 pg#44 |
|--|--|

Protege Twin-Tweeter Ceiling Speakers

Stereo Performance in a Single Speaker



Protege C825TTT 8" Ceiling Speaker

ITEM	U/M
PAS12825	Each

One ceiling speaker with 8" dual voice coil graphite woofer, two 1" pivoting aluminum dome tweeters, +3dB bass and treble contour switches and 150 watt power handling.

- | | |
|--|--|
| <ul style="list-style-type: none">• Power Handling: 150 Watts• Frequency Response: 28Hz – 22kHz• Impedance: 8Ω• Sensitivity: 92dB 1W/1m | <ul style="list-style-type: none">• Includes Thin-Bezel Grille held by Neo Magnets• Diameter x Depth: 11.125" x 4.25"• Ceiling Cut Out: 9.75"• Use Pre-Con Bracket PCB-C800 pg#44 |
|--|--|



Protege C625TT 6½" LCR Speaker

ITEM	U/M
PAS12625	Each

One ceiling speaker with 6.5" dual voice coil polypropylene woofer, two .5" hard dome tweeters and 75 watt power handling.

- | | |
|---|---|
| <ul style="list-style-type: none">• Power Handling: 75 Watts• Frequency Response: 36Hz – 20kHz• Impedance: 8Ω• Sensitivity: 92dB 1W/1m | <ul style="list-style-type: none">• Includes Thin-Bezel Grille held by Neo Magnets• Diameter x Depth: 9.25" x 3.625"• Ceiling Cut Out: 8.25"• Use Pre-Con Bracket PCB-C600 pg#44 |
|---|---|



Protege Cabinet Speakers

Premium Bookshelf and Dolby Atmos® Speakers



Protege LB62 6" Bookshelf Speakers

ITEM	U/M
LB62	Pair

Our top bookshelf speakers are perfect for smaller systems and surround sound. Features 6" graphite woofers, 1" silk dome tweeters and 100 watt power handling.

The LB62 has a matte black finish and removable black grilles with neo-magnets, integrated flush mounted single-slot wall mounts and threaded brass inserts for OmniMount 15.0 Wall or 15.0 Ceiling brackets. Add the LDA5 speaker to turn the

LB62 into an immersive sound system compatible with height and effect.

- | | |
|------------------------------------|--|
| • Power Handling: 100 Watts | • Sensitivity: 86dB |
| • Frequency Response: 74Hz – 20kHz | • Cabinet Design: Rounded Corner MDF Cabinets |
| • Impedance: 6Ω | • Dimensions (H x W x D): 13.125" x 8.4375" x 9.5" |



Protege LDA5 5" Dolby Atmos® Speakers

ITEM	U/M
LDA5	Pair

Our Dolby Atmos enabled loudspeakers reflect sound off the ceiling for immersive Dolby Atmos and DTS:X surround sound. Features a slanted speaker baffle, 5" graphite woofers, 1" silk dome tweeters and 60 watt power handling. The LDA5 features a matte black finish, removable black grilles with neo-magnets and integrated flush mounted single-slot wall mounts. Designed to sit on top of the LFS6 or LB62, or mount on the wall below the ceiling.

- | | |
|-------------------------------------|--|
| • Power Handling: 60 Watts | • Sensitivity: 84dB |
| • Frequency Response: 120Hz – 20kHz | • Cabinet Design: Rounded Corner MDF Cabinets |
| • Impedance: 6Ω | • Dimensions (H x W x D): 5.875" x 8.875" x 10.25" |



Protege LCRE5 Dual 5" LCR and Effect Speaker

ITEM	U/M
LCRE5	Each

Our best LCR and effect speaker delivers high power from its two 5" graphite woofers, a 1" silk dome tweeter and 100 watt power handling. Features a matte black finish, removable black grille with neo-magnets and two integrated flush mounted cross-slotted wall mounts. Easily mounts horizontally or vertically.

- | | |
|------------------------------------|---|
| • Power Handling: 100 Watts | • Sensitivity: 87dB |
| • Frequency Response: 74Hz – 20kHz | • Cabinet Design: Rounded Corner MDF Cabinets |
| • Impedance: 6Ω | • Dimensions (H x W x D): 7.1875" x 20" x 4" |

Protege Cabinet Speakers

Easily mountable, compact and powerful system



Protege LSB3 3-channel Passive Soundbar

ITEM	U/M
LSB3	Each

Use this three-channel passive soundbar with any A/V receiver to build a compact yet powerful home theater system. Features six 3" graphite woofers, three 1" silk dome tweeters and 60 watt (per channel) power handling. The LSB3 has a matte black finish and removable black grille with neo-magnets. Includes a Proficient-designed horizontally adjustable wall-mounting bracket.

- Power Handling: 60 Watts (per channel)
- Frequency Response: 140Hz – 20kHz
- Impedance: 6Ω
- Sensitivity: 88dB
- Cabinet Design: Rounded Corner MDF Cabinets
- Dimensions (H x W x D): 5.1875" x 39.8125" x 2.75"



THE NEXT
EVOLUTION OF
Sunfire[®]
TECHNOLOGY



The New Generation Proficient Subwoofers

The lineup of Proficient® Audio Subwoofers adds heavyweight performers to each performance series. Building on the legacy of innovation and technology from our Sunfire® subwoofers the Reference, Signature and Protege Series of Subwoofers are ready to bring the bass.

With legendary High Back EMF design allowing for an ultra-compact power to size ratio the new subwoofers are setting a new standard for bass performance. These high-powered subwoofers deliver an immersive audio experience that can both be felt and heard.

Brings an added focus on wireless technologies led by the Sub Station app to control subwoofer tuning and auto EQ with DSP and room correction. The redesigned wireless audio kit now transmits at 5Ghz frequency for an interference-free bass experience. Whether you are using a single sub or multiples, Proficient Audio gives you the flexibility to achieve the best possible sound for any room.



Reference Powered Subwoofers

Music / Media / Home Theater



Reference FTEQ-12 Dual 12" Subwoofer

ITEM	U/M
FTEQ12	Each

Featuring dual 12" force-cancelling active Kevlar drivers, Dual Monoblock Class D Amplifier with 500 Watt RMS and 1000 Watt Peak, with onboard DSP that offers wireless setup and control via a mobile device app. Luxury Piano Black Cabinet.

- | | |
|--|--|
| <ul style="list-style-type: none">• Amplifier Type: Class D Amp• Power Rating Continuous: 500 Watts x2 RMS• Power Rating Peak: 1000 Watts x2 Peak• Frequency Response: 17Hz – 200Hz• Inputs: RCA and XLR Balanced• Outputs: RCA and XLR Balanced• Voltage: 100v – 240v, 50Hz – 60Hz Selectable | <ul style="list-style-type: none">• APP Based DSP with Auto Room Correction• Built In 5v USB-A power port• Crossover: 40Hz – 500Hz• Finish: Luxury Piano Black Cabinet• Dampened Rubber Feet• Dimensions (H x W x D): 19.2" x 18.1" x 17.7"• Weight: 102.5 lbs |
|--|--|



Signature Powered Subwoofers

Music / Media / Home Theater

Signature FRS-12 12" Subwoofer

ITEM
FRS12

U/M
Each



A high excursion, fiberglass reinforced 12" front-firing woofer, Class D Amplifier with 500 Watt RMS and 1000 Watt Peak. App based tuning includes auto-EQ function with digital room correction and DSP. Luxury piano black cabinet with integrated mount for optional wireless audio kit PAS-WIR-SUB-KIT pg#28.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 500 Watts RMS
- Power Rating Peak: 1000 Watts Peak
- Frequency Response: 20Hz – 200Hz
- Inputs: Left and Right Line Level, LFE
- Outputs: Line Level High-Pass
- Voltage: 100v – 240v, 50Hz – 60Hz Selectable
- APP Based DSP with Auto Room Correction
- Built In 5v USB-A power port
- Crossover: 40Hz – 500Hz; Bypass
- Finish: Luxury Piano Black Cabinet
- Dampened Rubber Feet
- Dimensions (H x W x D): 13.8" x 14.2" x 14.6"
- Weight: 41.9 lbs

Signature FRS-10 10" Subwoofer

ITEM
FRS10

U/M
Each



A high excursion, fiberglass reinforced 10" front-firing woofer, Class D Amplifier with 500 Watt RMS and 1000 Watt Peak. App based tuning includes auto-EQ function with digital room correction and DSP. Luxury piano black cabinet with integrated mount for optional wireless audio kit PAS-WIR-SUB-KIT pg#28.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 500 Watts RMS
- Power Rating Peak: 1000 Watts Peak
- Frequency Response: 24Hz – 200Hz
- Inputs: Left and Right Line Level, LFE
- Outputs: Line Level High-Pass
- Voltage: 100v – 240v, 50Hz – 60Hz Selectable
- APP Based DSP with Auto Room Correction
- Built In 5v USB-A power port
- Crossover: 40Hz – 500Hz; Bypass
- Finish: High-Gloss Black MDF Cabinet
- Dampened Rubber Feet
- Dimensions (H x W x D): 12.2" x 12.6" x 13"
- Weight: 34.6 lbs

Signature FRS-8 8" Subwoofer

ITEM
FRS8

U/M
Each



A high excursion, fiberglass reinforced 8" front-firing woofer, Class D Amplifier with 300 Watt RMS and 1000 Watt Peak. App based tuning includes auto-EQ function with digital room correction and DSP. Luxury piano black cabinet with integrated mount for optional wireless audio kit PAS-WIR-SUB-KIT pg#28.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 300 Watts RMS
- Power Rating Peak: 1000 Watts Peak
- Frequency Response: 24Hz – 200Hz
- Inputs: Left and Right Line Level, LFE
- Outputs: Line Level High-Pass
- Voltage: 100v – 240v, 50Hz – 60Hz Selectable
- APP Based DSP with Auto Room Correction
- Built In 5v USB-A power port
- Crossover: 40Hz – 500Hz; Bypass
- Finish: High-Gloss Black MDF Cabinet
- Dampened Rubber Feet
- Dimensions (H x W x D): 10.3" x 10.7" x 11.1"
- Weight: 22.5 lbs

Protege Powered Subwoofers

Music / Media / Home Theater



Protege FDS-15 Triple 15" Subwoofer

ITEM
FDS15

U/M
Each

Featuring triple 15" polypropylene drivers with single active woofer and dual passive radiators. Powered by a Class D amplifier with 500 Watt RMS and 1000 Watt Peak. Matte black finished cabinet with built-In 5V USB with integrated mount for supported wireless audio kit PAS-WIR-SUB-KIT pg#28.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 500 Watts RMS
- Power Rating Peak: 1000 Watts Peak
- Frequency Response: 19Hz – 160Hz
- Inputs: Left and Right Line Level, LFE
- Outputs: Line Level High-Pass
- Voltage: 100v – 240v, 50Hz – 60Hz Selectable
- Phase Switch: 0 – 180°
- Crossover: 50Hz – 160Hz
- Finish: Matte Black Finish
- Dampened Rubber Feet
- Dimensions (H x W x D): 19" x 20" x 19.75"
- Weight: 65.5 lbs



Protege FDS-12 Triple 12" Subwoofer

ITEM
FDS12

U/M
Each

Featuring triple 12" polypropylene drivers with single active woofer and dual passive radiators. Powered by a Class D amplifier with 300 Watt RMS and 600 Watt Peak. Matte black finished cabinet with built-In 5V USB with integrated mount for supported wireless audio kit PAS-WIR-SUB-KIT pg#28.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 300 Watts RMS
- Power Rating Peak: 600 Watts Peak
- Frequency Response: 24Hz – 160Hz
- Inputs: Left and Right Line Level, LFE
- Outputs: Line Level High-Pass
- Voltage: 100v – 240v, 50Hz – 60Hz Selectable
- Phase Switch: 0 – 180°
- Crossover: 50Hz – 160Hz
- Finish: Matte Black Finish
- Dampened Rubber Feet
- Dimensions (H x W x D): 14.75" x 15.46" x 15.5"
- Weight: 37.7 lbs



Protege FDS-10 Triple 10" Subwoofer

ITEM
FDS10

U/M
Each

Featuring triple 10" polypropylene drivers with single active woofer and dual passive radiators. Powered by a Class D amplifier with 250 Watt RMS and 500 Watt Peak. Matte black finished cabinet with built-In 5V USB with integrated mount for supported wireless audio kit PAS-WIR-SUB-KIT pg#28.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 250 Watts RMS
- Power Rating Peak: 500 Watts Peak
- Frequency Response: 24Hz – 160Hz
- Inputs: Left and Right Line Level, LFE
- Outputs: Line Level High-Pass
- Voltage: 100v – 240v, 50Hz – 60Hz Selectable
- Phase Switch: 0 – 180°
- Crossover: 50Hz – 160Hz
- Finish: Matte Black Finish
- Dampened Rubber Feet
- Dimensions (H x W x D): 13.9" x 13.87" x 13.15"
- Weight: 30.1 lbs

Protege Powered Subwoofers

Protege FDS-8 Triple 8" Subwoofer

ITEM
FDS8

U/M
Each



Featuring triple 8" polypropylene drivers with single active woofer and dual passive radiators. Powered by a Class D amplifier with 200 Watt RMS and 400 Watt Peak. Matte black finished cabinet with built-in 5V USB with integrated mount for supported wireless audio kit.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 200 Watts RMS
- Power Rating Peak: 400 Watts Peak
- Frequency Response: 29Hz – 160Hz
- Inputs: Left and Right Line Level, LFE
- Outputs: Line Level High-Pass
- Voltage: 100v – 240v, 50Hz – 60Hz Selectable
- Phase Switch: 0 – 180°
- Crossover: 50Hz – 160Hz; Bypass
- Finish: Matte Black Finish
- Dampened Rubber Feet
- Dimensions (H x W x D): 11.73" x 12.44" x 12.48"
- Weight: 23.3 lbs

Subwoofer Wireless Kits

PAS-WIR-SUB-KIT Wireless Audio Subwoofer Kit

U/M
Kit



Consisting of one transmitter and one receiver the wireless audio receiver mounts to the back of the subwoofer. Expand your system with up to three additional receivers.

- Wireless connectivity range of 30 + feet
- Interference free - 5Ghz FHSS Technology
- Receiver mounts directly to the subwoofer
- Kit can expand up to four receivers
- All cables included

PAS-WIR-RX Wireless Audio Subwoofer Receiver

U/M
Each



Additional Receiver for Subwoofer Wireless Audio Kit. Each transmitter can accommodate up to four receivers.

- Wireless connectivity range of 30+ feet
- Interference free - 5Ghz FHSS Technology
- Receiver mounts directly to the subwoofer
- USB powered directly from Subwoofer USB port
- All cables included

Passive Architectural Subwoofers



Signature PAS-HRSIW8-CAB Dual 8" In-Wall Subwoofer

U/M
Each

Dual 8" Woofers with fiberglass cones with 150 Watt-600 Watt Peak. Sealed MDF cabinet with integrated wire management and vibration-free in-wall design. Paintable, thin-bezel, magnetic grille.

- High Back-EMF Efficiency Design
- Power: 150 Watt – 600 Watt Peak
- Frequency Response: 33Hz – 150Hz
- Paintable Thin-Bezel Magnetic Grille
- Requires Matching HRSIW8AMP
- Dimensions (H x W x D): 24.6" x 12.05" x 3.75"
- Weight: 32 lbs
- Retrofit Compatible with Dog Legs



Protege IWS105 10" In-Wall Subwoofer

ITEM
PAS24105 U/M
Each

In-Wall passive subwoofer with a 10" long excursion treated paper cone woofer and inverted ferrite magnet structure with a power handling capacity of 250 watts. Can be used with HRSIW8 Amplifier with crossover. For new construction, use the optional BB-IWS10 MDF back box.

- Replaces IWS100 In-Wall Sub
- Power Handling: 250 Watts
- Frequency Response: 36Hz – 150Hz
- Includes Thin-Bezel Grille held by Neo Magnets
- Dimensions (H x W x D): 13.625" x 13.625" x 3.75"
- Wall Cut Out (H x W): 12.0625" x 12.0625"
- Use with HRSIW8AMP Amplifier



Sunfire HRSIW8AMP Amplifier for PAS-HRSIW8-CAB

U/M
Each

The 520 Watt, Class D HRSIW8AMP amplifier is specifically designed to supply speaker-level power to the PAS-HRSIW8 in-wall subwoofer, to produce stunning low frequency effects for your home theater.

- RMS Power of 520 Watts
- Crossover Filters 12 – 36 dB/Octave
- Adjustable Slope
- Crossover Frequency 40 Hz – 160 Hz Adjustable, with LFE Bypass
- RCA Line Level, Balanced XLR Signal Inputs
- Pre-Programmed IR Remote Control
- Includes Bolt-On Rack Ears
- Dimensions (H x W x D): 23.3" x 16.2" x 5.8"
- Weight: 21 lbs



BB-IWS10 Back Box

ITEM
PAS02100 U/M
Each

Medium Density Fiberboard (MDF) back box for the IWS105 in-wall sub, designed to fit any standard 16" stud bay. Cuts down on translational energy vibration between adjacent walls. The IWS105 sub is tuned to the BB-IWS10 back box. Not for use with ICS11.

- Dimensions (H x W x D): 42.75" x 14.375" x 3.25"



Indoor/Outdoor and Landscape Speakers



Explore the Sounds of the Great Outdoors

Proficient® Audio all-weather, outdoor landscape speakers, cabinet speakers and rock speakers take the audio entertainment experience outside for listening pleasure in every environment. Totally scalable, Proficient Audio speaker solutions can cover small to large landscapes, patios, poolside and beyond.

Our top of the line series of Signature Speakers are designed to create an unmatched outdoor audio experience for the most discerning ear. With the more expansive lineup of Protege models offering an unbeatable blend of performance, styles and quality.

The always dependable outdoor/indoor hanging cabinet speakers round out our comprehensive all-weather audio solutions and wow with their superior sound and installation flexibility.

Proficient Audio outdoor sound systems perform under the harshest conditions and will elevate your backyard entertainment with years of premium long-lasting sound.



All-Weather Speakers

Durable enough to withstand the elements,
elegant enough for the living room



AW830wht | blk 8" Woofers

WHT	BLK	U/M
PAS42830	PAS42833	Pair

One pair of indoor/outdoor speakers with 8" polypropylene woofers, 3" graphite midrange, 1" pivoting soft dome tweeters and 175 watt power handling. Includes swivel mounting brackets. *Order in white or black.*

- Power Handling: 175 Watts
- Frequency Response: 35Hz – 20kHz
- Impedance: 4Ω
- Sensitivity: 89dB 1W/1m
- Dimensions (H x W x D): 15.75" x 8.75" x 8.75"



AW650wht | blk 6½" Woofers

WHT	BLK	U/M
PAS41650	PAS41653	Pair

One pair of indoor/outdoor speakers with 6.5" polypropylene woofers, 1" pivoting Supernil soft dome tweeters and 150 watt power handling. Includes swivel mounting brackets. *Order in white or black.*

- Power Handling: 150 Watts
- Frequency Response: 37Hz – 20kHz
- Impedance: 8Ω
- Sensitivity: 89dB 1W/1m
- Dimensions (H x W x D): 11" x 7" x 6.25"



AW525wht | blk 5¼" Woofers

WHT	BLK	U/M
PAS41525	PAS41527	Pair

One pair of indoor/outdoor speakers with 5.25" polypropylene woofers, 1" pivoting Supernil soft dome tweeters and 125 watt power handling. Includes swivel mounting brackets. *Order in white or black.*

- Power Handling: 125 Watts
- Frequency Response: 45Hz – 20kHz
- Impedance: 8Ω
- Sensitivity: 88dB 1W/1m
- Dimensions (H x W x D): 9.1875" x 6.5" x 6.375"



AW400wht | blk 4" Woofers

WHT	BLK	U/M
PAS41400	PAS41403	Pair

One pair of indoor/outdoor speakers with 4" polypropylene woofers, .75" Supernil soft dome tweeters and 100 watt power handling. Includes swivel mounting brackets. *Order in white or black.*

- Power Handling: 100 Watts
- Frequency Response: 55Hz – 20kHz
- Impedance: 8Ω
- Sensitivity: 87dB 1W/1m
- Dimensions (H x W x D): 7.75" x 5.5" x 5.5"

All-Weather Twin-Tweeter Speakers



AW500wht | blk Speaker

WHT	BLK	U/M
PAS42500	PAS42503	Each

One indoor/outdoor speaker with 5.25" dual voice coil polypropylene woofer, two 1" pivoting Supernil soft dome tweeters and 100 watt power handling. Weather-resistant ABS housing, powder coated aluminum grille. Includes swivel mounting bracket. Order in white or black.

- Power Handling: 100 Watts
- Frequency Response: 60Hz – 20kHz
- Impedance: 4Ω
- Sensitivity: 89dB 1W/1m
- Dimensions (H x W x D): 7" x 11" x 6.25"



Signature Landscape Speakers



Signature PAS-AW-GSBSUB-12 In-ground Subwoofer

U/M
Each

High performance 12" Mica-injected polypropylene in-ground subwoofer with 500 watt power handling. Weather proof HDPE buried enclosure with critter proof port assembly.

- Power Handling: Up to 500 Watts
- Frequency Response: 28Hz – 120kHz
- Impedance: 8Ω
- Sensitivity: 86dB
- Weight: 42.1 lbs



Signature PAS-AW-GSBSUB-10 In-ground Subwoofer

U/M
Each

High performance 10" Mica-injected polypropylene in-ground subwoofer with 300 watt power handling. Weather proof HDPE buried enclosure with critter proof port assembly.

- Power Handling: Up to 300 Watts
- Frequency Response: 30Hz – 120kHz
- Impedance: 8Ω
- Sensitivity: 84dB
- Dimensions (H x W x D): 15.75" x 15.75" x 22.84"
- Weight: 44.25 lbs



Signature PAS-AW-LS-6 Satellite Speakers

U/M
Each

High performance 6" two-way satellite speakers with polypropylene cone woofer and .75" aluminum dome tweeter. Weather-resistant fiberglass reinforced ABS enclosure.

- Power Handling: Up to 120 Watts
- Frequency Response: 100Hz – 20kHz
- Sensitivity: 87dB
- Impedance per speaker: 8Ω (in bypass mode)
- Tap Settings: 70v/100v: 3.75w (70v only), 7.5w, 15w, 30w, 8Ω (bypass)
- Designed to pair with PAS-AW-GSBSUB-10/12
- Weight: 10 lbs



Signature PAS-AW-LS-4 Satellite Speakers

U/M
Each

High performance 4" two-way satellite speakers with polypropylene cone woofer and .75" aluminum dome tweeter. Weather-resistant fiberglass reinforced ABS enclosure.

- Power Handling: Up to 90 Watts
- Frequency Response: 110Hz – 20kHz
- Sensitivity: 84dB
- Impedance per speaker: 8Ω (in bypass mode)
- Tap Settings: 70v/100v: 3.75w (70v only), 7.5w, 15w, 30w, 8Ω (bypass)
- Designed to pair with PAS-AW-GSBSUB-10/12
- Weight: 7.75 lbs

Speaker Accessories



Landscape Speaker Stake Mount

ITEM	U/M
AW-LS-Stake	Each

The Landscape Speaker Stake Mount is the most popular mounting method for the Landscape Satellite speakers and features a reinforced fluted tubular design that easily penetrates dense soil and provides a solid mounting platform. The quick connect design eliminates rotation of the speaker onto the mounting accessory eliminating a common failure point in other landscape products.

- For use with PAS-AW-LS-6 / PAS-AW-LS-4
- 12" stake mount for in-ground mounting
- Quick connect design for easy assembly
- Dimensions: 3.75" x 3.75" x 13"
- Sold individually



Landscape Speaker Surface Mount

ITEM	U/M
AW-LS-Mount	Each

The Landscape Speaker Surface Mount is designed for installations that require surface mounting like on a wall or deck. The durable die-cast aluminum construction is sturdy, features a quick connect design and includes a tool that locks the speaker in place for long term durability.

- For use with PAS-AW-LS-6 / PAS-AW-LS-4
- Designed for mounting to flat surfaces like walls or decks
- Quick connect design for easy assembly
- Dimensions: 3.9375" x 3.9375" x 1.875"
- Sold individually



Landscape Speaker Conduit Box Mount

ITEM	U/M
AW-LS-Conduit	Each

The Landscape Speaker Conduit Box is designed for installations using underground wire distribution using PVC conduit. The conduit box includes ample room for wire termination as well as a removable cover and multiple knockouts that prevent water intrusion. Featuring a stable base with aluminum spike reinforcement, the conduit box creates a robust mounting platform while the quick connect design eliminates rotation of the speaker onto the mounting accessory eliminating a common failure point in other landscape products.

- | | |
|--|--|
| <ul style="list-style-type: none">• For use with PAS-AW-LS-6 / PAS-AW-LS-4• Speaker mount for installations that use speaker wire in underground conduit• Doubles as a wiring junction box• Designed for use with standard .75" conduit• Stable base with aluminum spike reinforcement | <ul style="list-style-type: none">• Quick connect design for easy assembly• Includes additional 2" (50mm) extension arm for adjustable speaker height• Dimensions:<ul style="list-style-type: none">5.875" x 5.875" x 7.3" (without extension)5.875" x 5.875" x 9.3" (with extension) |
|--|--|

Protege Landscape Speakers

Durable enough to withstand the elements,
elegant enough for a garden party

	Protege PAS-4.1-BU	ITEM PAS-4.1-BU	U/M Kit
	Includes 4 x 4" weatherproof satellite speakers with polypropylene cone woofer and .75" titanium dome tweeter, weatherproof 8" burial DVC (Dual Voice Coil) subwoofer with polypropylene cone. Includes quick connect stakes. • Power Handling: 150 Watts • Frequency Response: 34Hz – 20kHz • Shipping Dimensions (H x W x D): 34" x 24" x 17.75" • Impedance: 8Ω • Expandable to 8.2 • Shipping Weight: 39 lbs		
	Protege PAS-4.1-HS	ITEM PAS-4.1-HS	U/M Kit
	Includes 4 x 4" weatherproof satellite speakers with polypropylene cone woofer and .75" titanium dome tweeter, weatherproof 8" hardscape DVC (Dual Voice Coil) subwoofer with polypropylene cone. Includes quick connect stakes. • Power Handling: 150 Watts • Frequency Response: 38Hz – 20kHz • Shipping Dimensions (H x W x D): 33.5" x 17.75" x 18" • Impedance: 8Ω • Expandable to 8.2 • Shipping Weight: 34 lbs		
	Protege PAS-2.0	ITEM PAS-2.0	U/M Pair
	Includes 2 x 4" weatherproof satellite speakers with polypropylene cone woofer and .75" titanium dome tweeter. Includes quick connect stakes. • Power Handling: 100 Watts • Frequency Response: 120Hz – 20kHz • Shipping Dimensions (H x W x D): 17.5" x 10" x 17.9" • Impedance per speaker: 32Ω • Designed to expand either PAS-4.1-HS or PAS-4.1-BU • Shipping Weight: 9.15 lbs		



Protege Rock Speakers

Backyard Perfection Outdoor Spaces



Protege PAS-RS8Si-GRANITE Rock Speaker

U/M
Each

Geo-realistic rock speakers with 8" DVC TCC polypropylene woofer, dual 1" Teteron tweeters and 10-200 watt power handling. **Order in speckled granite, shale brown, granite, or sandstone.**

- Power Handling: Up to 200 Watts
- Frequency Response: 50Hz – 21kHz
- Impedance: 8Ω Stereo/ L/R Summed (parallel) 4Ω
- Sensitivity: 88dB
- Weather-Resistant Design
- Dimensions (H x W x D): 19.5" x 16.5" x 12.5"
- Temperature Extremes: -50° to 185° F (-45° to 85° C)
- Warranty: Limited 5 Year



Protege PAS-RS8Si-SHALEBROWN Rock Speaker

U/M
Each

Geo-realistic rock speakers with 8" DVC TCC polypropylene woofers, dual 1" Teteron tweeters and 10-200 watt power handling. **Order in speckled granite, granite, or sandstone.**

- Power Handling: Up to 200 Watts
- Frequency Response: 50Hz – 21kHz
- Impedance: 8Ω Stereo/ L/R Summed (parallel) 4Ω
- Sensitivity: 88dB
- Weather-Resistant Design
- Dimensions (H x W x D): 19.5" x 16.5" x 12.5"
- Temperature Extremes: -50° to 185° F (-45° to 85° C)
- Warranty: Limited 5 Year



Protege PAS-RS8Si-SPECKLEDGRANITE Rock Speaker

U/M
Each

Geo-realistic rock speakers with 8" DVC TCC polypropylene woofers, dual 1" Teteron tweeters and 10-200 watt power handling. **Order in speckled granite, granite, or sandstone.**

- Power Handling: Up to 200 Watts
- Frequency Response: 50Hz – 21kHz
- Impedance: 8Ω Stereo/ L/R Summed (parallel) 4Ω
- Sensitivity: 88dB
- Weather-Resistant Design
- Dimensions (H x W x D): 19.5" x 16.5" x 12.5"
- Temperature Extremes: -50° to 185° F (-45° to 85° C)
- Warranty: Limited 5 Year



Protege PAS-RS8Si-SANDSTONE Rock Speaker

U/M
Each

Geo-realistic rock speakers with 8" DVC TCC polypropylene woofers, dual 1" Teteron tweeters and 10-200 watt power handling. **Order in speckled granite, granite, or sandstone.**

- Power Handling: Up to 200 Watts
- Frequency Response: 50Hz – 21kHz
- Impedance: 8Ω Stereo/ L/R Summed (parallel) 4Ω
- Sensitivity: 88dB
- Weather-Resistant Design
- Dimensions (H x W x D): 19.5" x 16.5" x 12.5"
- Temperature Extremes: -50° to 185° F (-45° to 85° C)
- Warranty: Limited 5 Year

Protege Rock Speakers

Backyard Perfection Outdoor Spaces



Protege PAS-RS6-GRANITE Rock Speaker

U/M
Each

Geo-realistic rock speakers with 6.5" TCC polypropylene woofer, 1" Teteron tweeter and 10-150 watt power handling. Order in speckled shale brown, granite, or sandstone.

- Power Handling: Up to 150 Watts
- Frequency Response: 70Hz – 21kHz
- Impedance: 8Ω
- Sensitivity: 88dB
- Weather-Resistant Design
- Dimensions (H x W x D): 14" x 11" x 12"
- Temperature Extremes: -50° to 185° F (-45° to 85° C)
- Warranty: Limited 5 Year




Protege PAS-RS6-SHALEBROWN Rock Speaker

U/M
Each

Geo-realistic rock speakers with 6.5" TCC polypropylene woofers, 1" Teteron tweeter and 10-150 watt power handling. Order in speckled granite, granite, or sandstone.

- Power Handling: Up to 150 Watts
- Frequency Response: 70Hz – 21kHz
- Impedance: 8Ω
- Sensitivity: 89dB
- Weather-Resistant Design
- Dimensions (H x W x D): 14" x 11" x 12"
- Temperature Extremes: -50° to 185° F (-45° to 85° C)
- Warranty: Limited 5 Year

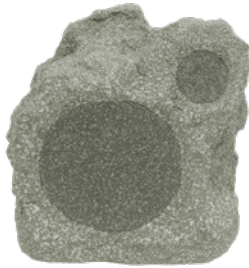

Protege PAS-RS6-SPECKLEDGRANITE Rock Speaker

U/M
Each

Geo-realistic rock speakers with 6½" TCC polypropylene woofers, 1" Teteron tweeter and 10-150 watt power handling. Order in shale brown, granite, or sandstone.

- Power Handling: Up to 150 Watts
- Frequency Response: 70Hz – 21kHz
- Impedance: 8Ω
- Sensitivity: 89dB
- Weather-Resistant Design
- Dimensions (H x W x D): 14" x 11" x 12"
- Temperature Extremes: -50° to 185° F (-45° to 85° C)
- Warranty: Limited 5 Year



Protege PAS-RS6-SANDSTONE Rock Speaker

U/M
Each

Geo-realistic rock speakers with 6.5" TCC polypropylene woofers, 1" Teteron tweeter and 10-150 watt power handling. Order in speckled granite, shale brown, or granite.

- Power Handling: Up to 150 Watts
- Frequency Response: 70Hz – 21kHz
- Impedance: 8Ω
- Sensitivity: 89dB
- Weather-Resistant Design
- Dimensions (H x W x D): 14" x 11" x 12"
- Temperature Extremes: -50° to 185° F (-45° to 85° C)
- Warranty: Limited 5 Year

Protege Planter Speaker

Durable enough to withstand the elements,
elegant enough for the living room



Protege PAS-PS6Si-CONCRETE Planter Speaker

U/M
Each

Planter Speaker 6.5" DVC TCC polypropylene woofer, dual 1" Teteron tweeters and 10-100 watt power handling. Can be used with live plants.

- Power Handling: Up to 100 Watts
- Frequency Response: 60Hz – 21kHz
- Impedance: 8Ω Stereo/ L/R Summed (parallel) 4Ω
- Sensitivity: 89dB
- Weather-Resistant Design
- Dimensions (H x W x D): 19.5" x 19.5" x 19.5"
- Temperature Extremes: -50° to 185° F (-45° to 85° C)
- Warranty: Limited 5 Year



Volume Controls



VC60i Volume Control

ITEM	U/M
PAS35377	Each

60-watt impedance-balancing volume control with autoformer. Features quick and secure wire connecting system. Fits in most single-gang J-boxes and plaster rings. Includes white, bone and almond plates, inserts and knobs.

- | | |
|---|--|
| <ul style="list-style-type: none">• Power Handling Continuous: 60 Watts• Power Handling Peak: 120 Watts• Frequency Response: 20Hz – 20kHz | <ul style="list-style-type: none">• Steps: 12 (Make Before Break)• Total Attenuation: 42dB (Max)• Depth: 2.55 Behind Plate |
|---|--|



VC60AW Volume Control

ITEM	U/M
PAS34320G	Each

60-watt weather-resistant volume control sealed against dust and moisture. Fits onto .75" conduit or can be surface mounted. Available in Gray.

- | | |
|---|---|
| <ul style="list-style-type: none">• Power Handling Continuous: 60 Watts• Power Handling Peak: 120 Watts• Frequency Response: 20Hz – 20kHz• Steps: 12 (Make Before Break) | <ul style="list-style-type: none">• Total Attenuation: 42dB (Max)• Dimensions (H x W x D): 4.5" x 2.75" x 3.5" |
|---|---|



Accessories

Accessories

Ceiling Tile Brackets



CPC-800 8" Ceiling Cover Plate

ITEM
PAS03800

U/M
Pair

One pair of white cover plates for 8" 2-way, LCR and twin-tweeter ceiling speakers.

CPC-600 6½" Ceiling Cover Plate

ITEM
PAS03600

U/M
Pair

One pair of white cover plates for 6.5" 2-way, LCR and twin-tweeter ceiling speakers.

Back Boxes



BB-IWS10 Back Box

ITEM
PAS02100

U/M
Each

Medium Density Fiberboard (MDF) back box for the IWS105 in-wall sub, designed to fit any standard 16" stud bay. Cuts down on translational energy vibration between adjacent walls. The IWS105 sub is tuned to the BB-IWS10 back box. Not for use with ICS11.

- Dimensions (H x W x D): 42.75" x 14.375" x 3.25"

Accessories

Pre-Construction Brackets



PCB-C800 Pre-Construction Brackets


ITEM	U/M
PCB11800	Pair

One pair of pre-construction brackets for new construction. Fits 8" 2-way, LCR and twin-tweeter ceiling speakers.

PCB-C600 Pre-Construction Brackets

ITEM	U/M
PCB11600	Pair

One pair of pre-construction brackets for new construction. Fits 6.5" 2-way, LCR and twin-tweeter ceiling speakers.

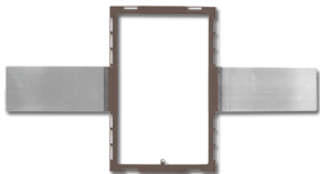

PCB-W800 Pre-Construction Brackets

ITEM	U/M
PCB21800	Pair

One pair of pre-construction brackets for new construction. Fits 8" in-wall speakers.

PCB-W600 Pre-Construction Brackets

ITEM	U/M
PCB21600	Pair

One pair of pre-construction brackets for new construction. Fits 6.5" in-wall speakers.



PCB-IW600 Pre-Construction Brackets

ITEM	U/M
PCB22600	Pair

One each pre-construction bracket for new construction. Fits 6.5" in-wall LCR speakers.



PCB-IW500 Pre-Construction Brackets

ITEM	U/M
PCB22500	Pair

One each pre-construction bracket for new construction. Fits 5.25" in-wall LCR speakers.

Ceiling Replacement Speaker Grilles



Thin-Bezel 10" Ceiling LCR Grille	ITEM 1001-131031	U/M Each
Compatible with Proficient Signature 10" Ceiling LCR Speakers.		

Thin-Bezel 8" Ceiling Grille	ITEM 1001-11801	U/M Each
Compatible with Proficient Signature and Protege 8" 2-way, LCR and Twin-Tweeter Ceiling Speakers.		

Thin-Bezel 6.5" Ceiling Grille	ITEM 1001-11602	U/M Each
Compatible with Proficient Signature and Protege 6.5" 2-way, LCR and Twin-Tweeter Ceiling Speakers.		



Thin-Bezel 5.25" Ceiling Grille	ITEM 1001-11501	U/M Each
Compatible with Proficient Protege 5.25" Ceiling Speakers.		


Thin-Bezel 6.5" Ceiling Grille	ITEM SRG-C6-SG	U/M Each
Square Grille for 6.5" Ceiling Speakers.		

Thin-Bezel 10" Ceiling Sub Grille	ITEM 1001-13111	U/M Each
Compatible with Proficient Signature and Protege 8" In-Wall Speakers.		



In-Wall

Replacement Speaker Grilles



Thin-Bezel 6.5" In-Wall LCR Grille	ITEM 1001-22630	U/M Each
Compatible with Proficient Signature and Protege 8" In-Wall Speakers.		



Thin-Bezel 5.25" In-Wall LCR Grille	ITEM 1001-22530	U/M Each
Compatible with Proficient Signature and Protege 6.5" In-Wall Speakers.		



Thin-Bezel 10" In-Wall Sub Grille	ITEM 1001-24105-2	U/M Each
Compatible with Proficient Signature and Protege 8" In-Wall Speakers.		

Thin-Bezel 8" In-Wall Grille	ITEM 1001-21801	U/M Each
Compatible with Proficient Signature and Protege 8" In-Wall Speakers.		

Thin-Bezel 6.5" In-Wall Grille	ITEM 1001-21601	U/M Each
Compatible with Proficient Signature and Protege 6.5" In-Wall Speakers.		

Indoor/Outdoor Replacement Speaker Grilles




AW830 Grilles	WHT 1001-42830	BLK 1001-42833	U/M Pair
Compatible with AW830 Outdoor/Indoor Speakers.			

AW650 Grilles	WHT 1001-41650	BLK 1001-41653	U/M Pair
Compatible with AW650 Outdoor/Indoor Speakers.			

AW525 Grilles	WHT 1001-41525	BLK 1001-41527	U/M Pair
Compatible with AW525 Outdoor/Indoor Speakers.			

AW400 Grilles	WHT 1001-41400	BLK 1001-41403	U/M Pair
Compatible with AW400 Outdoor/Indoor Speakers.			



AW600TT Grille	WHT 1001-42600	BLK 1001-42603	U/M Each
Compatible with AW600TT Twin-Tweeter Outdoor/Indoor Speakers.			

AW500TT Grille	WHT 1001-42500	BLK 1001-42503	U/M Each
Compatible with AW500TT Twin-Tweeter Outdoor/Indoor Speakers.			

PROFICIENT[®]

AUDIO a **Nice** brand

proficientaudio.com

©2026 Nice North America LLC. Proficient is a registered trademark of Nice North America LLC. All rights reserved.
Other brand names and product names mentioned herein may be the trademarks, trade names, service marks or registered trademarks of their respective owners.
PH7184 Rev-C 03/2026